



1. 概述规格 (General Specification)

项目 (Item)		规格/条件 (Specification/Condition)	
1.1	型号 (Model NO.)	DF0602512B2UN	
1.2	外形尺寸 (Outline)	60*60*25mm	
1.3	额定电压 (Rated Voltage)	DC 12V	
1.4	操作电压 (Operating Voltage Range)	10.8~13.2V	
1.5	启动电压 (Starting Voltage)	DC 7V. MAX	a. 额定电压 (Rated Voltage) b. 25° C, 65% RH
1.6	额定电流 (Rated Current)	0.41A (MAX 0.60A)	
	安规电流 (Safty Current)	0.60A	
1.7	额定电流消耗功率 (Power Consumption)	4.92W	
1.8	安规电流消耗功率 (Power Consumption)	7.2W	
1.9	转速 (Speed)	7800±10%R. P. M	a. 25° C, 65%RH b. 自由空气 (Free Air) c. 额定电压 (Rated Voltage)
1.10	风量 Airflow (At Zero Static Pressure)	42.82 CFM	a. 额定电压 (Rated Voltage) b. AMCA标准 (Standard) c. 额定电流 (Rated Current)
		1.21 M ³ /MIN	
1.11	静压 Air Pressure (At Zero Flow)	19.27 mm-H ₂ O	
		0.76 inch-H ₂ O	
1.12	噪音水准 (Noise Level)	50.0dB (A)	a. 额定电压 (Rated Voltage) b. 无音室测试 (Measured in a Non-Echo Chamber) c. CNS 8753 标准 (Standard) d. ISO 3744 测试条件 (Test Condition)
1.13	寿命 (Life expectancy)	70,000/hrs 40° C	AMBIENT 15%-65RH L10 at Conf. Level 90%
1.14	防护等级 (Ingress Protection)	黑色保密胶	满足中性盐雾环境工作48H
1.15	扇叶数 (No. of Blade)	7叶 (Blades)	
1.16	磁极数 (No. of Pole)	4极 (Poles)	
1.17	运转方向 (Rotating Direction)	逆时针	由扇叶面查看

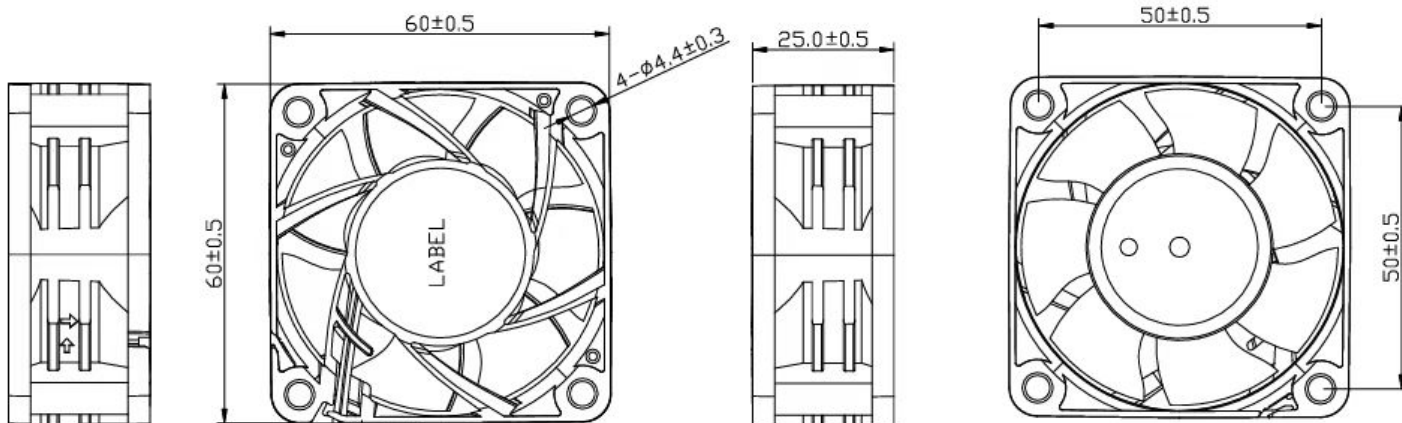

黑色热缩套管
材质: EVA 阻燃 VW-1

Ø 30mm 标签



X ₁ ±0.4	X ₁ °±3°
.X ₂ ±0.2	.X ₂ °±2°
.XX±0.1	.XX°±1.5°
.XXX±0.005	.XXX°±1°
UNITS:	mm

THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF LUXSHARE-TECH
AND SHALL NOT BE REPRODUCED,
COPIED OR CURED IN ANY MANNER
WITHOUT THE PRIOR WRITTEN CONSENT
OF LUXSHARE-TECH

Customer P/N:	
Customer REV.:	
PART NO.	LSJ602512TU2P004-R
APPROVED:	李柏松
CHECKED:	蒋波
DRAWN:	邱学萍

LUXSHARE-TECH		
TITLE:	6025- 成品图 DF0602512B2UN	
DWG NO:	RD-135-230918-005	
SCALE	SHEET	REV.
NONE	1/1	A1

8

7

6

5

4

3

2

1

A4